


Pressure Drop Chart


Pressure drop varies depending on the louver size and airflow rate. Refer to the performance chart for detailed pressure drop values.

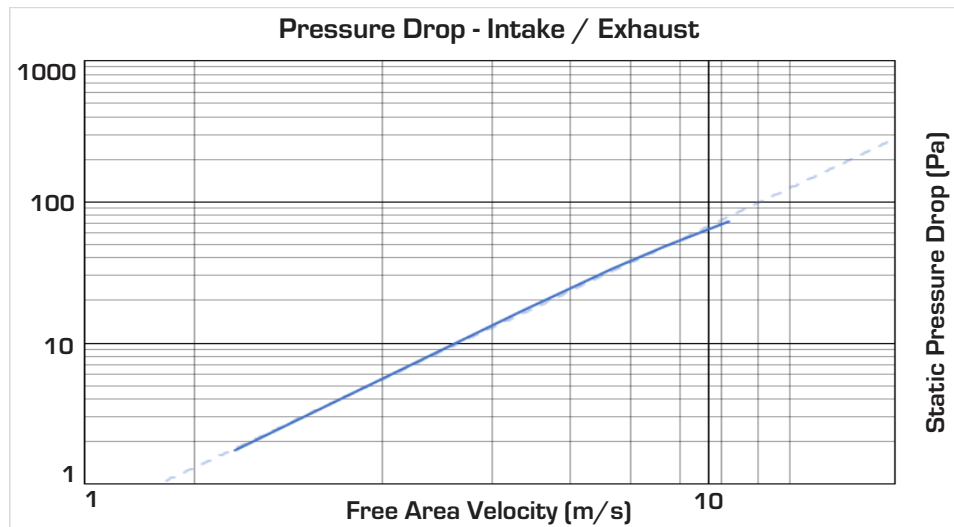

Tested in accordance with ANSI/AMCA 500-L, Figure 5.5. Performance data is based on a test specimen measuring 1220mm x 1220mm (48" x 48")

Free Area Chart (sqm)

mm		Width																
		600	750	900	1050	1200	1350	1500	1650	1800	1950	2100	2250	2400	2550	2700	2850	3000
Height	600	0.07	0.09	0.11	0.13	0.15	0.17	0.19	0.21	0.23	0.24	0.26	0.28	0.30	0.32	0.34	0.36	0.38
	750	0.11	0.14	0.16	0.19	0.22	0.25	0.28	0.31	0.34	0.37	0.40	0.42	0.45	0.48	0.51	0.54	0.57
	900	0.11	0.14	0.16	0.19	0.22	0.25	0.28	0.31	0.34	0.37	0.40	0.42	0.45	0.48	0.51	0.54	0.57
	1050	0.14	0.18	0.22	0.26	0.30	0.33	0.37	0.41	0.45	0.49	0.53	0.57	0.60	0.64	0.68	0.72	0.76
	1200	0.18	0.23	0.27	0.32	0.37	0.42	0.47	0.51	0.56	0.61	0.66	0.71	0.76	0.80	0.85	0.90	0.95
	1350	0.21	0.27	0.33	0.39	0.44	0.50	0.56	0.62	0.68	0.73	0.79	0.85	0.91	0.96	1.02	1.08	1.14
	1500	0.21	0.27	0.33	0.39	0.44	0.50	0.56	0.62	0.68	0.73	0.79	0.85	0.91	0.96	1.02	1.08	1.14
	1650	0.25	0.32	0.38	0.45	0.52	0.59	0.65	0.72	0.79	0.86	0.92	0.99	1.06	1.13	1.19	1.26	1.33
	1800	0.28	0.36	0.44	0.51	0.59	0.67	0.75	0.82	0.90	0.98	1.05	1.13	1.21	1.29	1.36	1.44	1.52
	1950	0.32	0.41	0.49	0.58	0.67	0.75	0.84	0.93	1.01	1.10	1.19	1.27	1.36	1.45	1.53	1.62	1.71
	2100	0.32	0.41	0.49	0.58	0.67	0.75	0.84	0.93	1.01	1.10	1.19	1.27	1.36	1.45	1.53	1.62	1.71
	2250	0.35	0.45	0.55	0.64	0.74	0.84	0.93	1.03	1.13	1.22	1.32	1.41	1.51	1.61	1.70	1.80	1.90
	2400	0.39	0.50	0.60	0.71	0.81	0.92	1.03	1.13	1.24	1.34	1.45	1.56	1.66	1.77	1.87	1.98	2.09
	2550	0.42	0.54	0.66	0.77	0.89	1.00	1.12	1.23	1.35	1.47	1.58	1.70	1.81	1.93	2.04	2.16	2.28
	2700	0.42	0.54	0.66	0.77	0.89	1.00	1.12	1.23	1.35	1.47	1.58	1.70	1.81	1.93	2.04	2.16	2.28
	2850	0.46	0.59	0.71	0.84	0.96	1.09	1.21	1.34	1.46	1.59	1.71	1.84	1.96	2.09	2.21	2.34	2.47
	3000	0.50	0.63	0.77	0.90	1.04	1.17	1.31	1.44	1.58	1.71	1.85	1.98	2.12	2.25	2.39	2.52	2.66



Central Ventilation Systems certifies that the Acoustical Louver Model XA-8.8 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to sound and air performance ratings only.

Suggested Specification:

Furnish and install acoustical louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall have 45° stationary "Airfoil" blades within an 8" (200mm) deep frame. Components shall be factory assembled. Oversized units shall be supplied in factory-assembled sections for field assembly by the installing contractor to achieve the required overall dimensions.

Acoustical louvers shall be model CVS XA-8.8, Galvanized Iron construction as follows:

FRAME: 8" (200mm) deep, 18 ga (1.2mm) nominal wall thickness.

BLADE: Stationary "Airfoil" blades, 45° angle, 18 ga (1.2mm) nominal wall thickness.

FINISH: Select finish specification from CVS Finishes brochure.



Size Recommendation:

Louver dimensions are based on the wall opening size.

Single-section louver: Overall louver size shall be 3mm undersized relative to the wall opening.

Multi-section louver: Overall louver size shall be 6mm undersized relative to the wall opening.

8" Airfoil Blade Acoustical Louver Model XA-8.8	Cat Id: XA-8.8	Rev.No: 00	Date: July 2026	Page: 1/1
---	-------------------	---------------	--------------------	--------------