
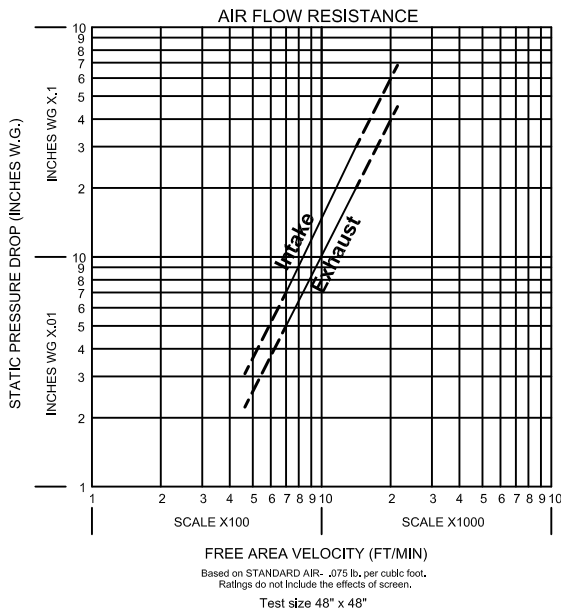


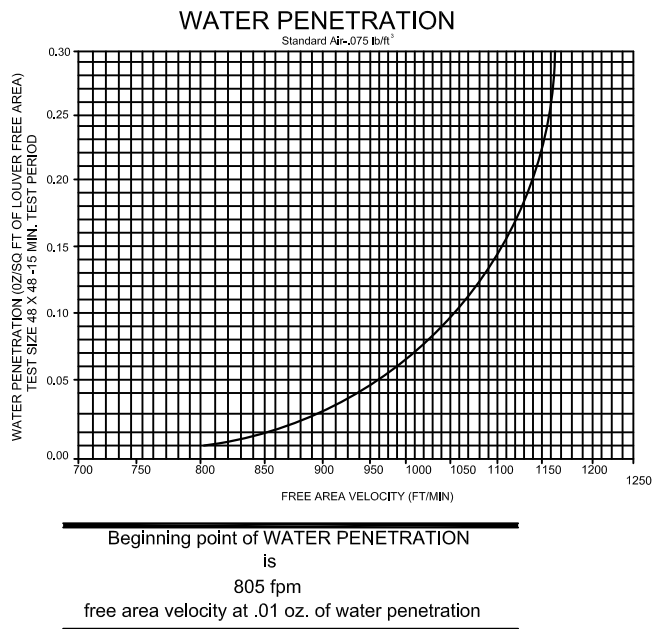

FREE AREA CHART (SQUARE FEET)

Louver Height	Louver Width In Inches																				Louver Height
Inches	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	Inches	
12	0.33	0.54	0.74	0.95	1.16	1.36	1.57	1.77	1.98	2.18	2.39	2.59	2.80	3.00	3.21	3.41	3.62	3.82	4.03	12	
18	0.57	0.92	1.27	1.63	1.98	2.33	2.68	3.03	3.38	3.74	4.09	4.44	4.79	5.14	5.49	5.85	6.20	6.55	6.90	18	
24	0.81	1.31	1.81	2.30	2.80	3.30	3.80	4.30	4.79	5.29	5.79	6.29	6.79	7.28	7.78	8.28	8.78	9.28	9.77	24	
30	1.11	1.79	2.47	3.15	3.83	4.52	5.20	5.88	6.56	7.24	7.93	8.61	9.29	9.97	10.65	11.33	12.02	12.70	13.38	30	
36	1.35	2.19	3.02	3.85	4.69	5.52	6.35	7.19	8.02	8.85	9.69	10.52	11.35	12.19	13.02	13.85	14.69	15.52	16.35	36	
42	1.60	2.58	3.57	4.55	5.54	6.52	7.51	8.49	9.48	10.46	11.45	12.43	13.42	14.40	15.39	16.37	17.36	18.34	19.33	42	
48	1.85	2.98	4.12	5.26	6.39	7.53	8.66	9.80	10.94	12.07	13.21	14.35	15.48	16.62	17.75	18.89	20.03	21.16	22.30	48	
54	2.09	3.38	4.67	5.96	7.24	8.53	9.82	11.11	12.39	13.68	14.97	16.26	17.55	18.83	20.12	21.41	22.70	23.98	25.27	54	
60	2.34	3.78	5.22	6.66	8.10	9.54	10.97	12.41	13.85	15.29	16.73	18.17	19.61	21.05	22.49	23.93	25.37	26.81	28.25	60	
66	2.53	4.09	5.65	7.21	8.77	10.33	11.89	13.45	15.00	16.56	18.12	19.68	21.24	22.80	24.36	25.92	27.48	29.03	30.59	66	
72	2.77	4.48	6.18	7.89	9.59	11.30	13.00	14.71	16.41	18.12	19.82	21.53	23.23	24.94	26.64	28.35	30.06	31.76	33.47	72	
78	3.01	4.86	6.71	8.56	10.42	12.27	14.12	15.97	17.82	19.67	21.52	23.38	25.23	27.08	28.93	30.78	32.63	34.49	36.34	78	
84	3.25	5.24	7.24	9.24	11.24	13.24	15.23	17.23	19.23	21.23	23.23	25.22	27.22	29.22	31.22	33.22	35.21	37.21	39.21	84	
90	3.48	5.63	7.77	9.92	12.06	14.21	16.35	18.49	20.64	22.78	24.93	27.07	29.22	31.36	33.50	35.65	37.79	39.94	42.08	90	
96	3.72	6.01	8.30	10.59	12.88	15.18	17.47	19.76	22.05	24.34	26.63	28.92	31.21	33.50	35.79	38.08	40.37	42.66	44.95	96	
102	4.02	6.50	8.97	11.45	13.92	16.40	18.87	21.35	23.82	26.30	28.77	31.25	33.72	36.20	38.67	41.15	43.62	46.10	48.57	102	
108	4.27	6.89	9.52	12.15	14.77	17.40	20.03	22.65	25.28	27.91	30.53	33.16	35.79	38.41	41.04	43.67	46.29	48.92	51.55	108	
114	4.51	7.29	10.07	12.85	15.63	18.41	21.18	23.96	26.74	29.52	32.30	35.07	37.85	40.63	43.41	46.19	48.96	51.74	54.52	114	
120	4.76	7.69	10.62	13.55	16.48	19.41	22.34	25.27	28.20	31.13	34.06	36.99	39.92	42.85	45.78	48.71	51.63	54.56	57.49	120	

SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall be stationary drainable type with drain gutters in each blade and downspouts in jambs and mullions. Stationary drainable blades shall be contained within a 2.16" frame. Louver components (heads, jambs, sills, blades, and mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind load of 30 lbs. Per sq. ft. (equivalent of a 110 mph).

Published louver performance data bearing the AMCA Certified Ratings Seal for Air Performance & Water Penetration must be submitted for approval prior to fabrication and must demonstrate pressure drop and water penetration equal to or less than the CVS model specified.

Louvers shall be model FL-D-2, 6063-T6 extruded aluminum construction as follows:
Frame: 2.16" deep, .060 nominal wall thickness.
Blades: .060 nominal wall thickness. Drainable.
Blades are positioned at 37-degree angle and spaced approximately 1.47" center to center.
Screen: .75" x .051" (19 x 1.3) expanded, flattened aluminum in removable frame.