

**MODEL AXF-8****8" [203mm] ACOUSTICAL LOUVER****STANDARD CONSTRUCTION:**

**Frame:** 8" [203mm] Deep x 18 gauge galvanized steel

**Blade (air side):** 18 gauge galvanized steel

**Blade (noise side):** 20 gauge galvanized perforated steel

**Sound Absorber:** Advanced Microfibers composed of Polyester and Polyolefin

**Screen:** 0.75" x 0.051" [19.05mm x 1.30mm] flattened aluminum screen mounted in removable frames.

**Minimum Louver Size:** 12"w x 16"h [305mm x 406mm]

**Maximum Louver Size:** 48"w x 120"h [1219mm x 3048mm]

Louvers more than 48" [1219mm]w are built in mult. sections

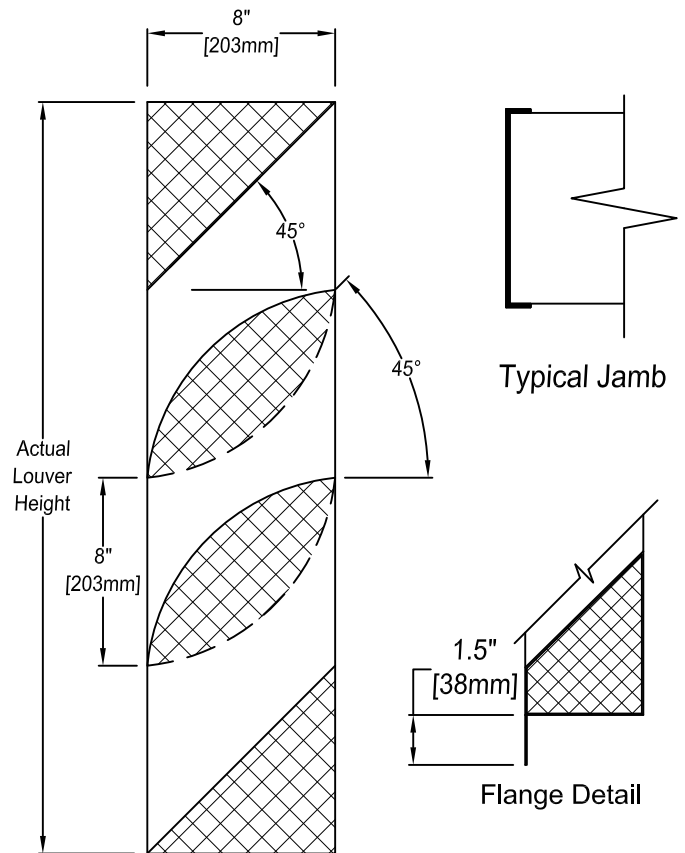
**OPTIONS:**

- ☐ Flanged Frame (1.5" std.) [38mm]
- ☐ Custom Flange (1", 2", or 3") [25mm, 51mm, or 76mm]
- ☐ Extended Sill
- ☐ Insect Screen (Other Screens Available, See Screen Page)
- ☐ Filter Racks (no screen)
- ☐ Security Bars
- ☐ Hinged Sub Frame
- ☐ Welded Construction
- ☐ Blank-off, Steel, non-insulated, no screen, non-removeable
- ☐ Blank-off, Steel, non-insulated, with bird screen or insect screen
- ☐ Blank-off, Steel, insulated double wall, with bird screen, removable
- ☐ Blank-off, Steel, insulated double wall, no screen, non-removeable
- ☐ Aluminum Construction
- ☐ 304 Stainless Steel Construction
- ☐ 316 Stainless Steel Construction

**AVAILABLE FINISHES:**

- ☐ **Powder Polyester TGIC** (2 coats) baked on at 410°F [210° C], 2.5 to 3.5 mils Meets AAMA-2603 Standards
- ☐ **Powder Super durable polyester** (2 coats) baked on at 410°F [210° C], 2.5 to 3.5 mils Meets AAMA-2604-05 Standards
- ☐ **Acrylic baked enamel** (ACRA-BOND® ULTRA) by AkzoNobel baked on at 350°F [177° C], 0.8 to 1.2 mils dry Meets AAMA-2603 Standards
- ☐ **Kynar®** (ALUM\*A\*STAR®) 2 coats by AkzoNobel baked on at 450°F [222° C], 1.2 to 1.6 mils dry Meets AAMA-2604-05 Standards
- ☐ **Kynar 500®** or HYLAR® 5000 70% TRINAR® (2 coats) by AkzoNobel baked on at 450°F [222° C], 1.2 to 1.6 mils dry, Meets AAMA-2605-05 Standards
- ☐ **Kynar 500®** or HYLAR® 5000 (70% Tri-Escent II) (2 coats) by AkzoNobel, a superior finish to other metallic or anodized finishes. A blend of mica, ceramic, and inorganic pigments creates subtle yet dazzling design that goes beyond metallic color without the requirement of a clear coat. 14 standard colors - custom colors available. Baked on at 415°F [213° C], 1.4 to 1.8 mils dry, meets AAMA 2605-05.
- ☐ **Clear Anodize** 204 R-1 Class II (AA-C22A31)(0.4 to 0.7 mil)
- ☐ **Clear Anodize** 215 R-1 Class I (AA-C22A41)(>0.7 mil)
- ☐ **Integral Color Anodize** (AA-C22A42)(>0.7 mil)

- Clear coat available for all above finishes.
- Hylar® 5000 is a registered trademark of Solvay Solexis, Inc.
- Kynar® 500 is a registered trademark of Arkema.
- ALUM\*A\*STAR® 50 and TRINAR® are registered trademarks of AkzoNobel
- ACRA-BOND® ULTRA is a registered trademark of AkzoNobel

**Model AXF-8****Model AXF-8****Acoustical Performance**

Octave Band HZ	63	125	250	500	1000	2000	4000	8000
Free Noise Reduction DB	11	12	11	12	13	13	13	13

To calculate transmission loss (db), subtract the 6 db from the freefield noise reduction (db)

\*Width and Height dimensions are approximately 1/4" [6.35mm] under listed size.

**MODEL AXF-8**  
**8" [203mm] ACOUSTICAL LOUVER**